


O3 module (A) – Replacing the scrubber

- 1- Tools you need
 - 1 wrench 7/16" and 1 wrench 1/2"
- 2- Locate the scrubber inside the airpointer

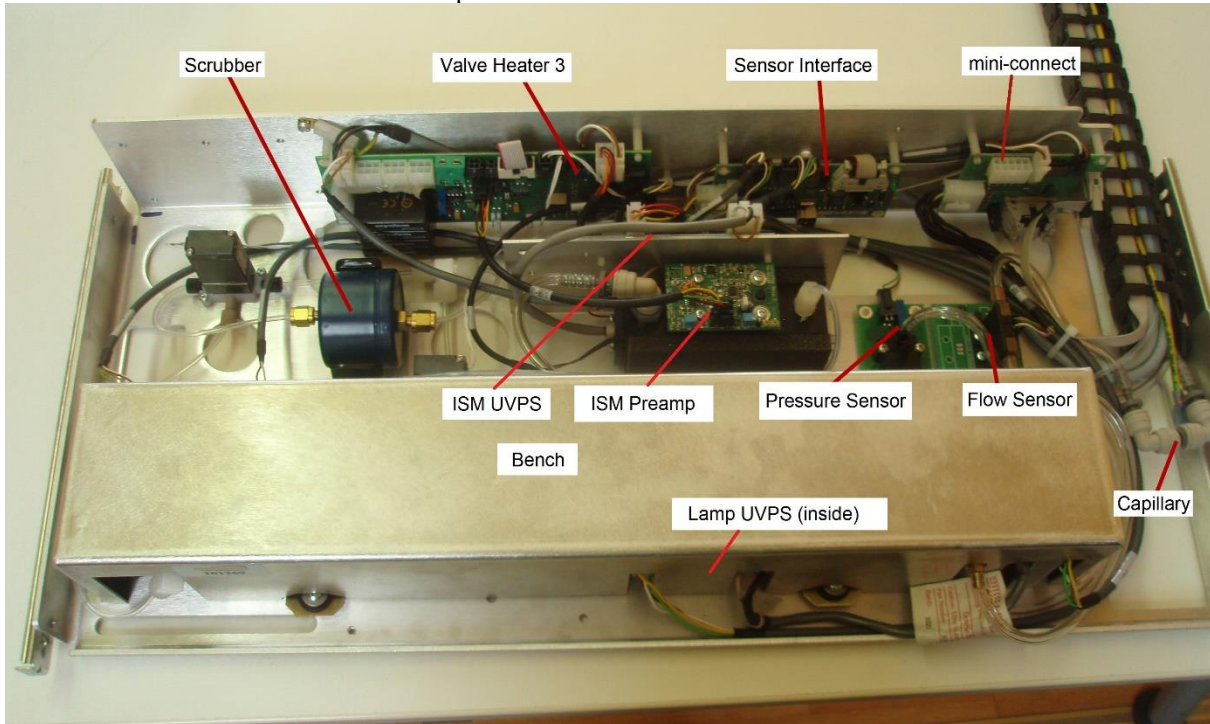

- 3- Disconnect the two 1/8" tubes on the front and the back side of the scrubber
- 4- Remove the old scrubber by taking it out of the black clamp
- 5- Insert the new scrubber the same way you located the old one
- 6- Reconnect the two 1/8" tubes to the scrubber
- 7- Perform a Sample Flow Check