


O3 module (A) – Checking the capillary

- 1- Turn off the airpointer, pull out the power cord, and pull out the ozone module
- 2- Locate the capillary

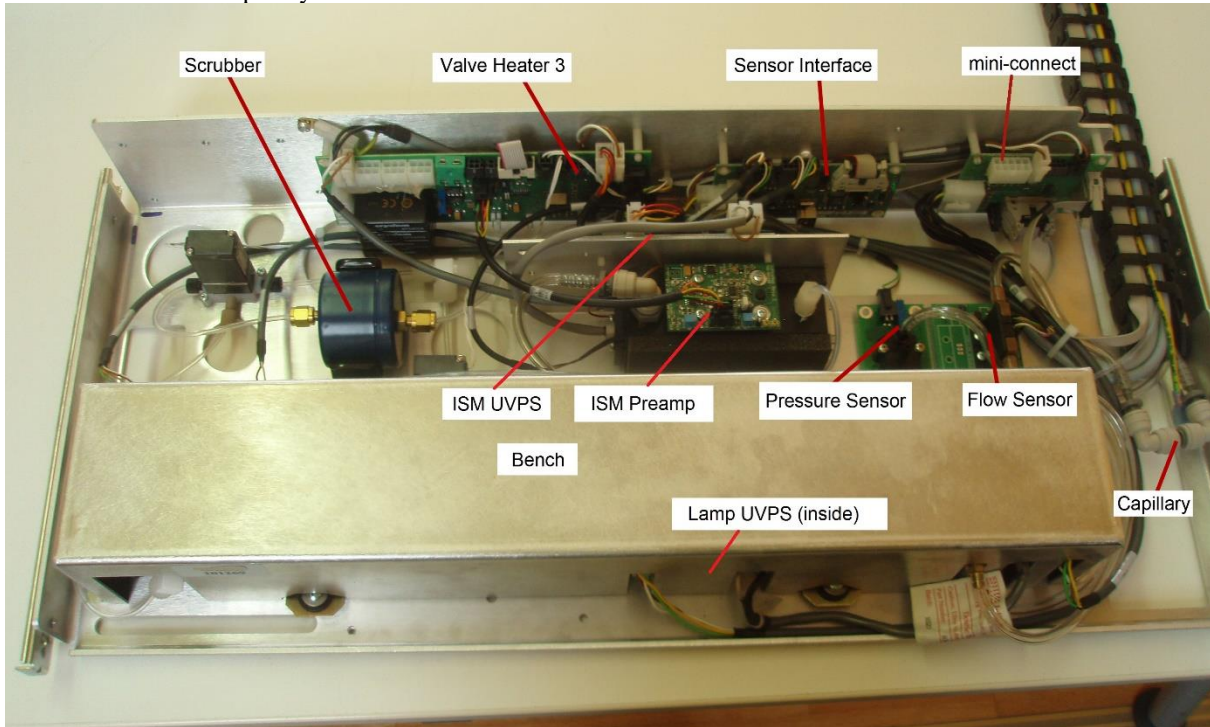

- 3- Remove the push-fit connectors holding the capillary, inspect it and if necessary, install a new capillary. In the absence of flow / pressure / leak problems, and if the capillary looks clean and intact, put the capillary back in place