


SO2 module (T) – Checking the capillary

1- Turn off and unplug the airpointer. Pull the SO2 module drawer

2- Locate the capillary (801-980013 Capillary purple)

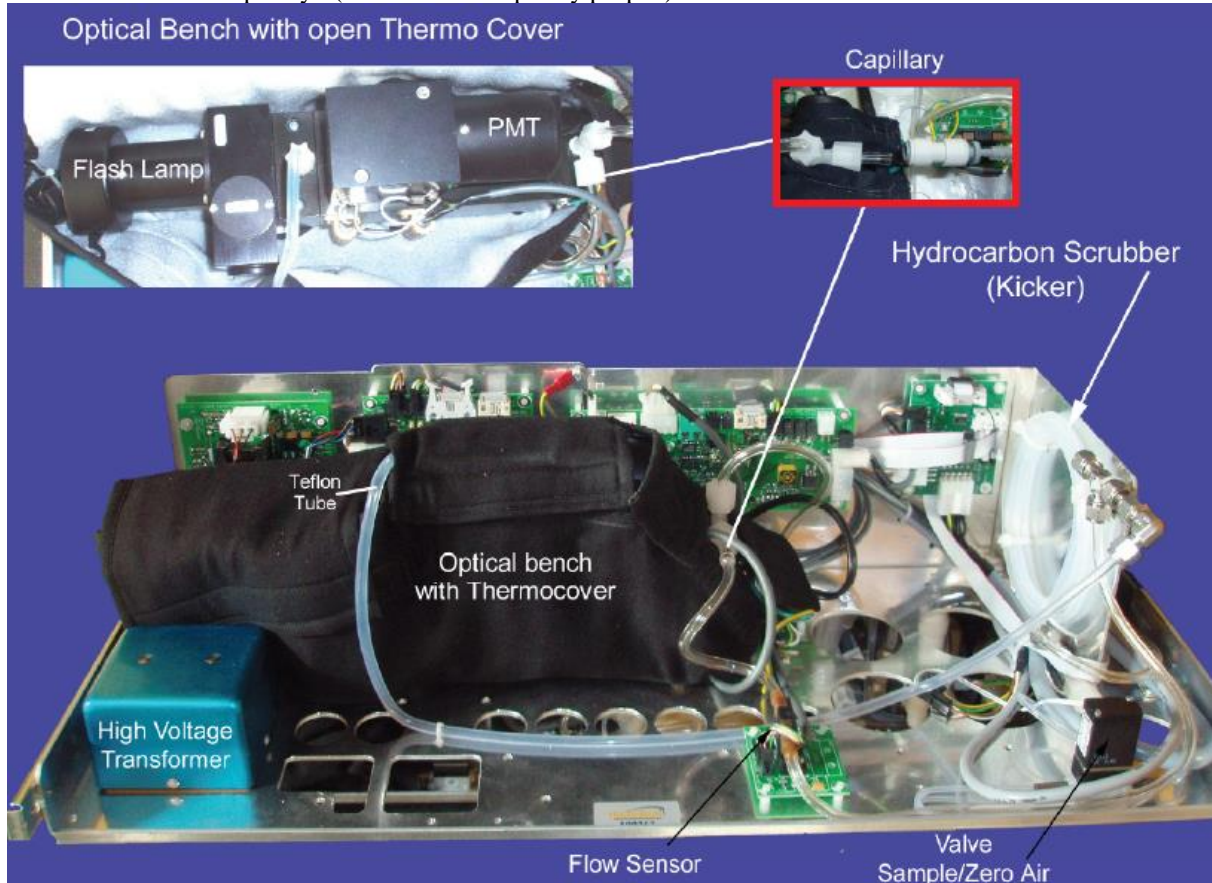

3- Unlock the push-fit connectors holding the DFU filter, remove the DFU filter, and install a new DFU filter in the same position. Then, remove the push-fit connectors holding the capillary, inspect it and if necessary, install a new capillary. In the absence of flow / pressure / leak problems, and if the capillary looks clean and intact, put the capillary back in place